



## envir-o<sup>®</sup> ET series

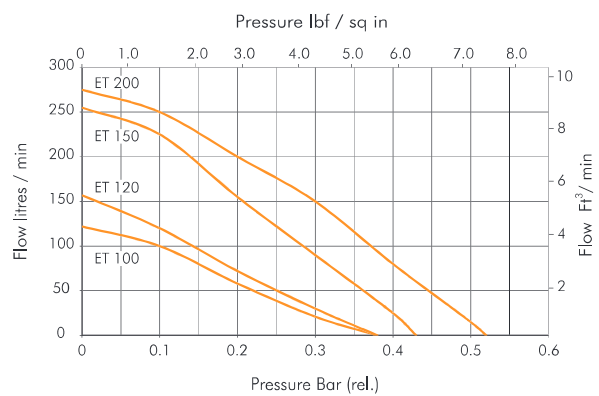

### Performance

- ✓ 30 to 200 litres per minute
- ✓ Green drive technology - energy efficient motors low power consumption
- ✓ Specially formulated diaphragm material for extended life
- ✓ Robust and compact construction - weatherproof
- ✓ Easy to service with competitively priced spares kit
- ✓ Suited to intermittent or continuous duty applications
- ✓ Used by original equipment manufacturers of NSF certified residential sewage treatment systems
- ✓ Thermally protected

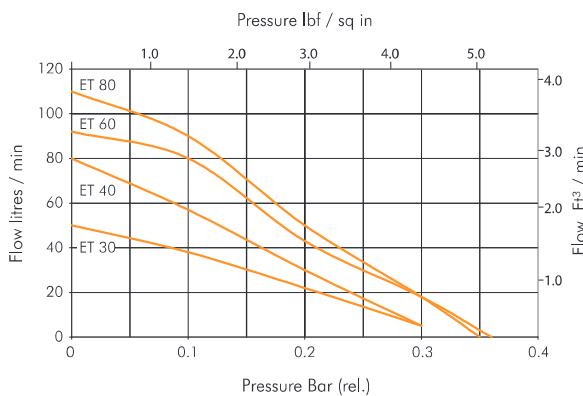


At Charles Austen Pumps we recommend Enviro-o<sup>®</sup> pumps are serviced every 18 months, service kits for each pump can be purchased from us.

Service kit



Ideal for use with our diffuser range


## envir-o® ET series

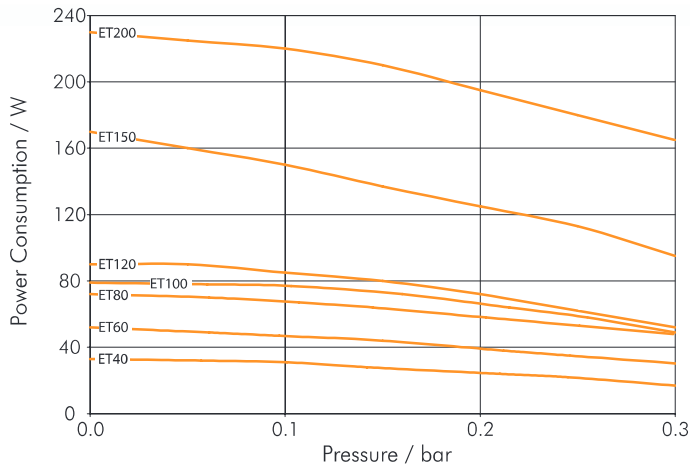


Model no.	Performance	Power consumption (w)	Noise level (db)
	Flow (l/min) @ Pressure (bar)		
ET30	30.0 @ 0.15	25	40
ET40	40.0 @ 0.15	30	40
ET60	60.0 @ 0.15	55	40
ET80	80.0 @ 0.10	75	40
ET100	100.0 @ 0.10	80	45
ET120	120.0 @ 0.10	90	45
ET150	150.0 @ 0.15	160	45
ET200	200.0 @ 0.15	230	45

### Dimensions

#### ET30, ET40, ET150 & ET200

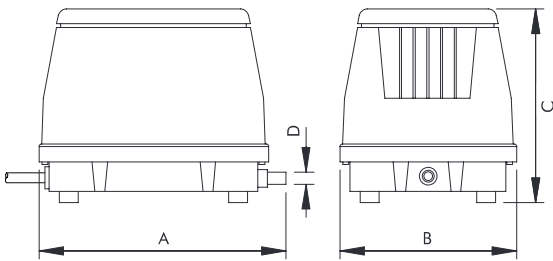

#### ET60, ET80, ET100 & ET120

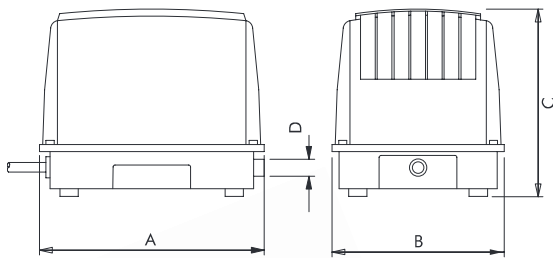

Model no.	Weight kg	Dimensions mm			
		A	B	C	D
ET40	4.3	220	155	190	14
ET60	6.0	203	165	153	18
ET80	7.0	210	185	171	18
ET100	8.5	238	196	177	18
ET120	9.5	265	215	198	18
ET150	9.0	256	200	222	18
ET200	9.0	256	200	222	18


### Connections

**ET40** - Plain, horizontal, connection 14.0mm OD also supplied with screw in barbed connector 10.0mm OD

**ET60, ET80, ET100, ET120** - Plain, horizontal, connection 18.0mm OD also supplied with screw in barbed connector 12.0mm OD

**ET150, ET200** - Plain, horizontal, connection 18.0mm OD

### Other models in the envir-o® range



ETA Series



ETX Series



ET250/300



ETX ECO Series

### Accessories

Elbow connector (included)



Large brass barbed connector 18.0mm and 20.0mm (optional)



Please note - it is important that you ensure the motor specification stated and the range of materials offered in the pump are compatible with the performance, environmental limitations and chemical resistance requirements of the application.

For further information or details of our extensive range of pumps, contact our technical sales office who will be pleased to help you select the most suitable pump for your application.