

NEW



VERTY NOVA

PUMPS FOR CLEAN WATER


WITH BUILT-IN FLOAT

Submersible pumps specifically designed for uses in narrow pits with dimensions down to 20 cm x 20 cm. Suitable to pump clear water containing particles with maximum diameter up to 5 mm.

- Anti-corrosive and rust-proof materials
- Integrated float switch
- Low suction capability: 2 – 3 mm
- Very low priming and starting level of the pump: 10 – 15 mm
- Knob for manual or automatic operation
- Easy access through sliding cover to float switch for cleaning


- Motor with thermal overload protection
- Excellent cooling of the motor that enables the pump to operate even when it is partially submerged
- Supplied with power cable with plug, non return valve and 4-step fitting

ELECTRICAL AND HYDRAULIC DATA

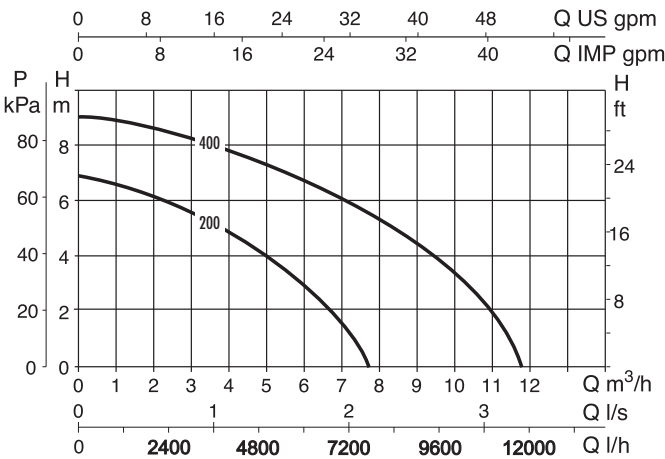

MODEL	VOLTAGE 50 Hz	P2 NOMINAL		Ø	CABLE LENGHT m.	Q m³/h	H m
		kW	HP				
VERTY NOVA 200 M	1 x 230 V	0,2	0,28	1 1/4"	10	0,5-6,6	6,1-1,3
VERTY NOVA 400 M	1 x 230 V	0,4	0,55	1 1/4"	10	0,5-10,8	8,8-1,4

DIMENSIONS AND WEIGHT

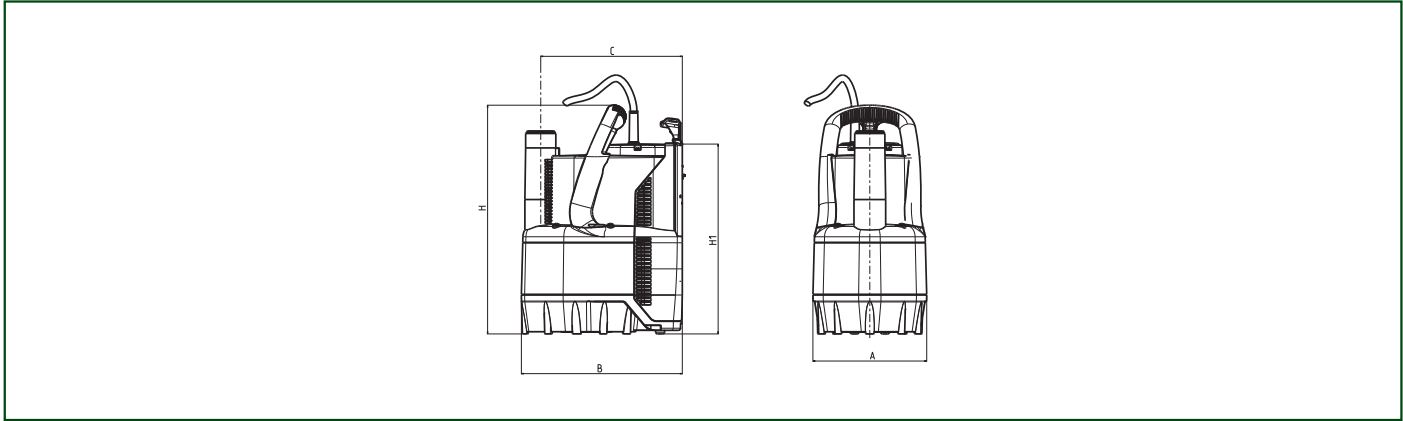

MODEL	A	B	C	ØD	H	H1	PACKAGING DIM. m³	GROSS WEIGHT Kg
VERTY NOVA 200 M	158	225	200	33	400	265	0,012	4,2
VERTY NOVA 400 M	158	225	200	33	400	265	0,013	5,1